

Split Phase Belted Fan and Blower

NEMA^{®†} 48 Frame, Single and Two Speed




APPLICATIONS:

To meet manufacturer's requirements for belted fans and blowers.

FEATURES:

- Resilient Base
- Class B Insulation Unless Otherwise Noted
- With Threaded Conduit Hole
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- **Discount Symbol: DS-3HAC**

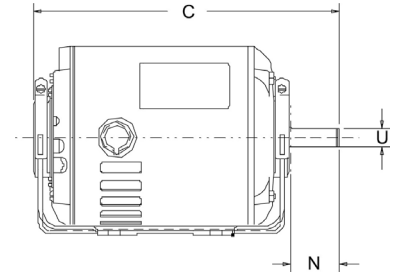

Single Speed, Open Dripproof

HP	RPM	Voltage	Catalog Number	List	Bearings	NEMA ^{®†} Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt. (lbs)	Notes
1/4	1725	115	8000	\$127	Ball	48	5.3	1.5	0.500	Auto	8.9	1.35	13	77,79
	1725	115	840CV	\$128	Ball	48	5.3	1.6	0.500	Auto	9.4	1.35	16	80,81,82
	1725	115	2889	\$251	Ball	48	4.4	1.5	0.500	Auto	9.9	1.35	21	83,A
	1725	115/208-230	PD6002	\$151	Ball	48Z	5.2/2.5-2.6	2.25	0.500	Auto	10.2	1.35	17	80
	1725	115	8505	\$192	Ball	48	5.0	1.5	0.500	Auto	10.7	1.00	17	
	1725	115/208-230	3618	\$136	Ball	48Z	5.2/2.5-2.6	1.875	0.500	Auto	9.3	1.35	14	
1/3	1725	115	8100	\$132	Ball	48	6.4	1.5	0.500	Auto	9.4	1.35	15	77,79
	1725	115	841CV	\$133	Ball	48	6.4	1.6	0.500	Auto	9.9	1.35	18	80,81,82
	1725	115-208/230	PD6004	\$178	Ball	48Z	6.6/3.1-3.3	2.25	0.500	Auto	10.7	1.35	19	80
1/2	1725	115	8200	\$158	Ball	48	8.0	1.5	0.500	Auto	10.0	1.25	18	77,79
	1725	115	1542C	\$168	Ball	48	8.0	1.6	0.500	Auto	9.9	1.25	21	80
	1725	115	2887	\$305	Ball	48	8.0	1.5	0.500	Auto	9.9	1.25	21	83,A
	1725	115/208-230	PD6006	\$219	Ball	48Z	8.6/4.2-4.3	1.9	0.500	Auto	10.7	1.25	20	80,81,98

Two Speed, Open Dripproof

HP	RPM	Voltage	Catalog Number	List	Bearings	NEMA ^{®†} Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt. (lbs)	Notes
1/3 / 1/6	1725/1140	115	1786	\$389	Ball	48	5.8	1.5	0.500	Auto	10.4	1.35	22	A
	1725/1140	230	1789	\$404	Ball	48	2.9	1.6	0.500	Auto	10.4	1.35	22	A

Note 77 With Shaft Adapter For 5/8" Shaft
 Note 79 Combination Mounting Holes For NEMA^{®†} 48 and 56 Frame Dimensions
 Note 80 Canadian Standard - Connected CCWLE (Reversible)
 Note 81 Canadian Standard - May Be Used With Single Pole Single Throw Switch; Not Stocked For U.S. Distribution

Note 82 Open, Ventilated
 Note 83 Enclosed Shell, Ventilation Through End Shields By Internal Fan
 Note 98 50/60 Hertz
 Note A Class A Insulation

† All marks shown within this document are properties of their respective owners.

Revised — August 2016